

# XIS-5335

# **Superior Compact Screening**

# **Checkpoint Security: Mail and Small Parcel Inspection**





## **TRANSPORTATION**

Airport entrances and perimeters, air cargo, and checkpoint technology.



## **PORTS & BORDERS**

Border control, sea ports, and other large cargo sectors.



## **CRITICAL INFRASTRUCTURE**

Access control for prisons, courthouses, mailrooms, hotel entrances and military bases.

The XIS-5335 is a compact X-Ray Inspection System with tunnel dimensions 53.3 cm x 35.6 cm (21.0" x 14.0"). The XIS-5335 is the smallest system in the XIS series and is designed for screening objects ranging from mailroom parcels to purses and backpacks.

The XIS-5335 has been installed at various checkpoint locations including government buildings, private hotels, and corporate mailrooms. Mounted on a compact frame with heavy duty roller casters, the XIS-5335 can be easily relocated to any site in need of an immediate screening solution.

The XIS-5335 offers the best in compact checkpoint security: quality, low cost ownership, flexibility and performance.

All Astrophysics X-ray Inspection Systems are equipped with Real-Time Diagnostics, a unique Astrophysics feature which allows users to monitor system health. This software was specifically engineered to save you valuable time and money. If requested, Astrophysics would also be able to connect to your system and troubleshoot any issues remotely.

An exclusive Astrophysics option is our 6 Color Imaging, which enables operators to view screened objects in 6 colors, each color correlating to a specific range of Atomic Z-Numbers. 6 Color Imaging enables operators to achieve optimal material identification which improves throughputs.

Astrophysics is committed to providing quality products and services nationwide. We listen to our customers and offer customizations and order flexibility based on their needs.

Backed by a team of engineers from our City of Industry, California center of excellence headquarters, Astrophysics designs cutting-edge X-ray screening technology for detecting weapons and contraband for transportation, ports, borders, critical infrastructure and other industries that present security risks.

Astrophysics is headquartered in the United States and maintains a global presence with service delivery worldwide. Astrophysics is committed to global safety and is proud to present this new age of screening security—driving the industry into the technology of tomorrow.





## **GENERAL SPECIFICATIONS**

· Tunnel Opening: 53.3 cm x 35.6 cm (W x H) 21.0" x 14.0"

• Dimensions<sup>2</sup>: 131.3 cm x 76.4 cm x 122.5 cm  $(L \times W \times H)$ 51.7" x 30.1" x 48.2" · Shipping Dimensions:  $144.8 \text{ cm } \times 86.3 \text{ cm } \times 165.0 \text{ cm}$ 

 $(L \times W \times H)$ 57.0" x 34.0" x 65.0" • Net Weight : 345 kg (761 lbs) Shipping Weight<sup>2</sup> 505 kg (1113 lbs)

23 cm/s (45 ft/min) Forward or Reverse · Conveyor Speed:

· Conveyor Height: 72.9 cm (28.7") from Floor

165 kg (364 lbs) Evenly Distributed Load · Conveyor Capacity:

## **TECHNICAL**

· Sensitivity:

1.0 mm Horizontal, 1.0 mm Vertical · Spatial Resolution: · Steel Penetration: 12 mm Typical, 10 mm Standard 24 Visible Levels, 4096 Gray Level · Contrast Sensitivity:

Guaranteed up to ISO 1600 (33 DIN) · Film Safety:

## X-RAY GENERATOR

· Voltage:

• Tube Current: · Cooling:

· Duty Cycle:

· Beam Direction:

· Detector:

## 90kV, Operating at 84kV

0.6 mA

Sealed Di-Electric Oil Bath with Forced Air 100%, No Warm-Up Procedure Required

Diagonally Upward

Intel® Core i5

4 GB RAM

Windows® OS

1 GB Video Card

1024 Channels in an L-Shaped Array

500 GB HDD, 120 GB SSD

Uninterruptible Power Supply

(Computer Operation- 20min)

Single 19" LCD Color Monitor

1280 x 1024; 24 Bit/Pixel Color

40 AWG Typical, 38 AWG Standard

## **COMPUTER**

• Processor:

· Memory:

· Storage:

· Video Card:

· Platform:

· Backup:

## **VIDEO**

• Display Type:

· Display Resolution:

**ENVIRONMENTAL** · Operating Temperature:

· Storage Temperature:

· Humidity:

0°C - 40°C \ 32°F - 104°F -20°C - 60°C \ -4°F - 140°F

Up To 95% Non-Condensing

## **ELECTRICAL**

· Power Requirements (XIS): (for XIS)


110VAC ± 10%, 50/60Hz, 15 Amp Max 220VAC ± 10%, 50/60Hz, 10 Amp Max

## **HEALTH AND SAFETY**

- Compliant with USFDA, Center for Devices and Radiation Health Standards for Cabinet X-Ray Systems (21-CFR 1020.40)
- Typical Radiation leakage is less than 0.1 mR/hr (Leakage less than 0.5 mR/hr permitted by the Federal Standard)



- · Density Alert
- Dual Monitors (19" or 24" LCD)
- Entry / Exit Roller Tables (50 cm Increments)
- Footmat Operator Interlock
- · Image Analysis Program (IAP)
- Image Analysis Program LITE (IAP LITE)
- · Larger Heavy Duty Casters
- · Local Language Support
- Polar Kit
- · Remote Workstation Configuration
- · Screener Assist Software
- · Sloped Conveyor
- · Threat Image Protection (TIP) Software
- · Tropical Kit
- · Wireless Barcode Scanning

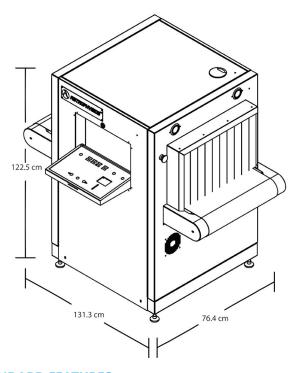

Material Discrimination

• Operator Training Program (OTP)

· Organic/ Inorganic Imaging

• Real-Time Image Manipulation

• Real-Time Self Diagnostics

· Reverse Monochrome

Vertical Zoom Panning

· Save Image (RGB)

· Multi-Tier Accessibility

· Print Image Capable

• Network Ready

Picture Perfect

• Pseudo Čolor

## **STANDARD FEATURES**

- 6 Color Imaging
- 9 Quadrant Zoom
- Atomic Z-Number Measurement
- Auto Image Archiving (150,000)
- · Baggage Counter
- · Color and Black / White Imaging
- Continuous Scanning
- Continuous Zoom up to 64x
- · Geometric Image Distortion Correction
- · High Penetration Function
- · Heavy Duty Roller Casters
- · Image Annotation
- · Image Review JPEG Conversion

- Custom Paint

- · Radiation Meter

- Test Case

C E PERRY JOHNSON UKAS UKAS

As tested on Astrophysics Inc. Test Piece

<sup>&</sup>lt;sup>2</sup>Weight and dimensions of the system may vary depending on customization.

<sup>3</sup> Optional Features may affect lead time, price, and weight of XIS-5335. Please contact your Astrophysics Sales Representative for more information. Due to continued product research and development, Astrophysics Inc. reserves the right to amend all technical specifications without prior notice.